



The Pioneers of Japanese Interchangeable Blade Handsaws

ZETSAW

 ZETSAW CATALOG



Okada Hardware Mfg. Co., Ltd
Postal code: 673-0404
561 Omura, Miki-city, Hyogo, Japan
TEL.: +81-794-83-2001 FAX: +81-794-70-8828
E-mail: sales1@z-saw.co.jp



<https://z-saw.co.jp/en/>



@zetsaw_japan



@Z2010p8

The published products are subject to change without notice due to improvements.



Inheriting the traditions of Japanese tools, innovating to shape the future.


MATERIAL



High Quality Material

All ZETSAW materials are sourced with very strict requirements to meet our standards.

PRODUCTION

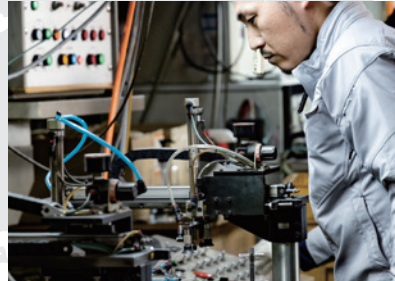

Production Process

Our production process is managed from start to finish by experienced saw artisans who take pride in their work.

QUALITY



Thorough Quality Control

With strict quality control throughout all stages of production, ZETSAW strives to be the name you can trust.

STOCK & DELIVERY




TO OUR CUSTOMERS



We at ZETSAW appreciate feedback from our loyal customers to see how we can improve our saws to suit your needs.

MANUFACTURING LINE

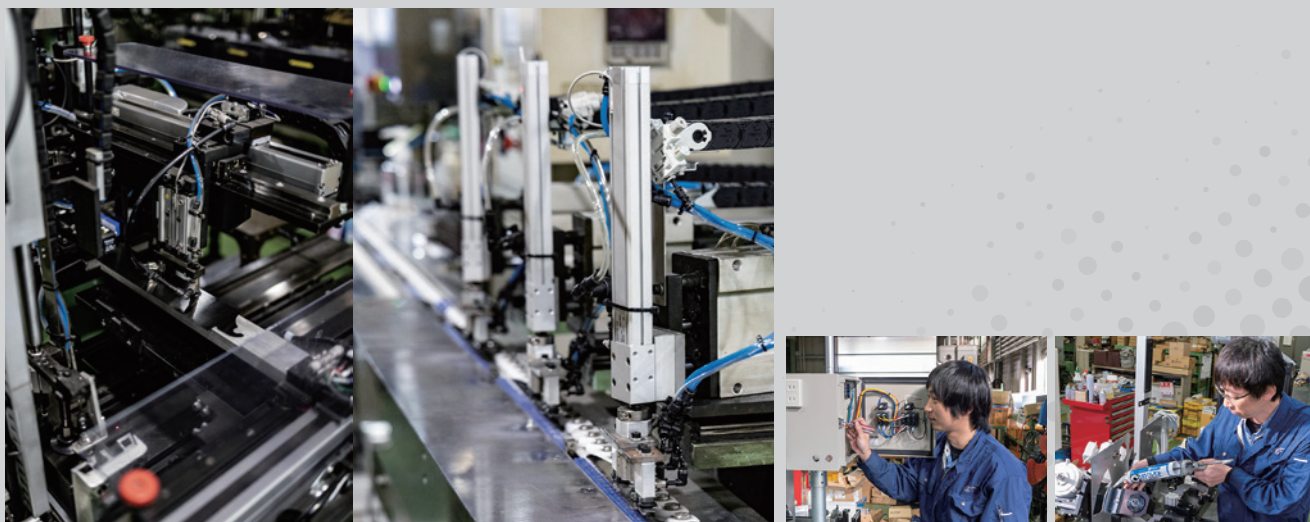

Factory Line Developed In-House

The ZETSAW manufacturing line has been built and improved upon by generations of engineers with a core understanding of both traditional Japanese handsaws and modern technology.

MARKETING



Brand Awareness & Promotion

We work with our customers worldwide through exhibitions and our social media to show everyone the brilliance of Japanese handsaws.

ICONS

CROSS CUT
Cross saw series for cutting against the grain smoothly.

RIP CUT
Rip saw series with chisel-like teeth for cutting along the grain.


UNIVERSAL CUT
Universal saw series with combination teeth for cutting wood at any angle.

HARD IMPULSE
IMPULSE HARDENING
ZETSAW branded blades are made in-house. The teeth are hardened through a process called Hard Impulse. This increases the blade's hardness to 850-950HV (66-68HRC) which is the maximum hardness that can be achieved with steel. Treating the teeth in this way helps keep them sharp for much longer than conventional counterparts. The core of the blade remains both flexible and tough to prevent it from bending or buckling during use.

No Set
Products with this icon do not have a Saw Set *. This enables even flush and convex cuts.

***Saw Set...**

The saw's teeth point right and left symmetrically. This results in a slightly wider kerf than the saw's own thickness, but less friction, therefore allowing the saw to cut smoothly. Products that don't show this icon have saw sets.

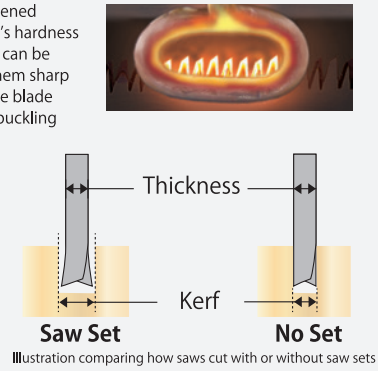

RECIPROCATING SAW series

ZETSAW RECIPROCATING SAW blades are engineered to achieve extreme sharpness.

WOODWORKING R-150

Ideal for work in narrow spaces and pocket cuts.



-
-
-
-
-



NO.	ITEM	BOX	CTN	SPEC	
20111	Blade	24	—	Blade Length	150mm
				Pitch	2.40mm
				Thickness	0.90mm

WOODWORKING R-210

The sharply ground teeth and added foreblade for pocket cuts make it ideal for construction woodwork.



-
-
-
-
-

NO.	ITEM	BOX	CTN	SPEC	
20100	Blade	24	288	Blade Length	210mm
20108	Blade (3pcs)	12	—	Pitch	3.00mm
				Thickness	0.90mm

FINE WOOD & PRUNING R-300

Ideal for demolishing, renovation and aggressive pruning.



-
-
-
-
-
-
-

NO.	ITEM	BOX	CTN	SPEC	
20110	Blade	24	—	Blade Length	300mm
				Pitch	3.50mm
				Thickness	1.20mm

WALLBOARD R-90

Ideal for pocket cuts on plywood, laminated wood, plaster boards, etc. without a pre-drilled pilot hole.



-
-
-
-
-
-



NO.	ITEM	BOX	CTN	SPEC	
20101	Blade	24	288	Blade Length	90mm
				Pitch	1.60mm
				Thickness	0.90mm

POCKET CUTTING R-50

The blade is designed for cutting out boards without damaging electrical wires behind walls.




-
-
-
-
-
-



NO.	ITEM	BOX	CTN	SPEC	
20107	Blade (3pcs)	12	—	Blade Length	50mm
				Pitch	1.60mm
				Thickness	0.90mm

PVC/PE PIPE R-210

The sharply ground teeth are designed for cutting PVC/PE pipes. They help speed up cutting and leave a clean cutting surface.

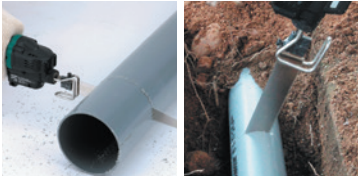

NO.	ITEM	BOX	CTN	SPEC	
20102	Blade	24	288	Blade Length Pitch Thickness	210mm 1.50mm 0.60mm

PVC/PE PIPE R-210 THICKER

Ideal for cutting PVC/PE pipes with the 0.9mm thick blade. This makes cutting thick pipes easier with less blade vibration. The pitch is wider than PVC/PE PIPE R-210, reducing the likelihood of dust clogging the teeth. Please refrain from using this blade with reciprocating saws with more than 18V power and/or featuring orbital action as it will crack pipes.



NO.	ITEM	BOX	CTN	SPEC	
20113	Blade	24	288	Blade Length Pitch Thickness	210mm 2.00mm 0.90mm



PRUNING R-150


Ideal for narrow space work and cutting branches.



NO.	ITEM	BOX	CTN	SPEC	
20112	Blade	24	—	Blade Length Pitch Thickness	150mm 2.40mm 0.90mm

PRUNING R-210

Ideal for pruning trees with great efficiency and leaving the cutting surface smooth.



NO.	ITEM	BOX	CTN	SPEC	
20103	Blade	24	288	Blade Length Pitch Thickness	210mm 3.00mm 0.90mm
20114	Blade (3pcs)	12	—		

BAMBOO R-210

Ideal for cutting bamboo without splinters.



NO.	ITEM	BOX	CTN	SPEC	
20104	Blade	24	288	Blade Length Pitch Thickness	210mm 2.15mm 0.80mm

BAMBOO HARVESTING R-300

Ideal for cutting Japanese timber bamboo, dried bamboo poles and Moso bamboo.



NO.	ITEM	BOX	CTN	SPEC	
20109	Blade	24	—	Blade Length Pitch Thickness	300mm 3.00mm 1.20mm



DEMOLISHING R-130

The tough blade made from HSS bi-metal is designed for furniture demolishing, cutting nails embedded in wood, aluminum frames, etc.



Japanese PACKAGE

NO.	ITEM	BOX	CTN	SPEC	
20141	Blade (3pcs)	12	—	Blade Length Thickness	130mm 1.25mm

DEMOLISHING R-210

The tough blade made from HSS bi-metal is designed for furniture demolishing, cutting nails embedded in wood, aluminum frames, etc.



Japanese PACKAGE



NO.	ITEM	BOX	CTN	SPEC	
20105	Blade (3pcs)	12	120	Blade Length Thickness	210mm 1.25mm
20121	Blade (6pcs)	6	72		

DEMOLISHING R-285

The tough blade made from HSS bi-metal is designed for furniture demolishing, cutting nails embedded in wood, aluminum frames, etc.



Japanese PACKAGE



NO.	ITEM	BOX	CTN	SPEC	
20106	Blade (3pcs)	12	120	Blade Length Thickness	285mm 1.25mm
20122	Blade (6pcs)	6	72		

HSS METAL R-130

The HSS bi-metal blade is ideal for cutting metal pipes, fiber reinforced plastic, ALC panels, etc.



Japanese PACKAGE

NO.	ITEM	BOX	CTN	SPEC	
20131	Blade (3pcs)	12	—	Blade Length Thickness	130mm 0.90mm

HSS METAL R-210

The HSS bi-metal blade is ideal for cutting metal pipes, fiber reinforced plastic, ALC panels, etc.



Japanese PACKAGE

NO.	ITEM	BOX	CTN	SPEC	
20132	Blade (3pcs)	12	—	Blade Length Thickness	210mm 0.90mm

CARBIDE HEAVY DUTY R-130

The tough carbide tipped bi-metal blade is ideal for cutting hardened screws embedded in wood, stainless pipes and other metal pipes.




Japanese PACKAGE

NO.	ITEM	BOX	CTN	SPEC	
20151	Blade	12	—	Blade Length Thickness	130mm 1.25mm

CARBIDE HEAVY DUTY R-210

The tough carbide tipped bi-metal blade is ideal for cutting hardened screws embedded in wood, stainless pipes and other metal pipes.

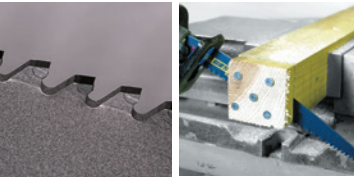

Japanese PACKAGE

NO.	ITEM	BOX	CTN	SPEC	
20152	Blade	12	—	Blade Length Thickness	210mm 1.25mm



CROSS H-225

Ideal for extra fine cross cuts with solid wood.



NO.	ITEM	BOX	CTN	SPEC	
15018	Saw	12	72	Blade Length	225mm
15019	Blade	24	288	Pitch	1.20mm
				Thickness	0.40mm

CROSS H-250

Designed for precise and fine cross cuts with solid wood.



NO.	ITEM	BOX	CTN	SPEC	
15006	Saw	12	72	Blade Length	250mm
15007	Blade	24	288	Pitch	1.40mm
				Thickness	0.50mm

UNIVERSAL H-250

Designed for intricate and precise rip, cross and slant cuts with sawn wood, plywood, solid wood, laminated wood, etc.



NO.	ITEM	BOX	CTN	SPEC	
15271	Saw	12	72	Blade Length	250mm
15270	Blade	24	288	Pitch	1.40mm
				Thickness	0.50mm

RIP H-250

The graduated sharp teeth and the narrow saw sets are ideal for cutting along grain of sawn wood.



NO.	ITEM	BOX	CTN	SPEC	
15009	Saw	12	72	Blade Length	250mm
15010	Blade	24	—	Pitch	—
				Thickness	0.50mm

HARDWOOD H-250

The specially designed robust and sharp teeth are ideal for cutting maple, ebony, mahogany, oak, etc.



NO.	ITEM	BOX	CTN	SPEC	
15069	Saw	12	72	Blade Length	250mm
15204	Blade	24	288	Pitch	1.75mm
				Thickness	0.50mm

CROSS H-265

The most popular carpentry saw among Japanese woodworkers. It is ideal for cutting across various types of solid wood.


Standard Japanese Carpentry Saw



NO.	ITEM	BOX	CTN	SPEC	
15003	Saw	12	72	Blade Length Pitch Thickness	265mm 1.75mm 0.60mm
15004	Blade	24	288		

CROSS H-265 CONVEX

The convex saw blade is ideal for quickly cross-cutting conventional sawn wood. It is also great for smooth and quick square cutting and cutting out a straight bottom line for joinery.



NO.	ITEM	BOX	CTN	SPEC	
15073	Saw	12	72	Blade Length Pitch Thickness	265mm 1.75mm 0.60mm
15063	Blade	24	288		

UNIVERSAL H-265

Designed for rip, cross and slant cutting sawn wood, plywood, solid wood, laminated wood, etc.



NO.	ITEM	BOX	CTN	SPEC	
15078	Saw	12	72	Blade Length Pitch Thickness	265mm 1.75mm 0.60mm
15076	Blade	24	288		

CROSS H-265 PISTOL

Ideal for cross cutting conventional sawn wood, plywood, laminated board, etc. The grip prevents your hands from slipping even when wearing gloves.



common blade with CROSS H-265					
NO.	ITEM	BOX	CTN	SPEC	
15046	Saw	6	72	Blade Length Pitch Thickness	265mm 1.75mm 0.60mm

UNIVERSAL H-300

The specially designed teeth are ideal for fairly aggressive rip, cross and slant cutting solid wood, sawn wood, plywood, laminated wood, etc.



NO.	ITEM	BOX	CTN	SPEC	
15011	Saw	12	72	Blade Length Pitch Thickness	300mm 2.15mm 0.70mm
15012	Blade	24	144		

RIP H-300

The graduated sharp teeth and narrow saw sets are ideal for cutting along the grain of sawn wood.



NO.	ITEM	BOX	CTN	SPEC	
15013	Blade	24	—	Blade Length Thickness	300mm 0.66mm

HEAVY DUTY H-333

The sturdy saw blade with tough universal saw teeth for rip, cross and slant cutting is ideal for heavy duty construction woodwork.




NO.	ITEM	BOX	CTN	SPEC	
15014	Saw	12	48	Blade Length Pitch Thickness	333mm 2.80mm 0.90mm
15015	Blade	24	144		



WAISTERN H-180 DAIKUME

Western style waist saw.
A tapered blade with sharp teeth for cutting plywood, blockboards in confined spaces.

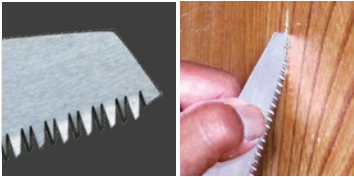

foreblade for pocket cuts

NO.	ITEM	BOX	CTN	SPEC	
15210	Saw	6	36	Blade Length	180mm
15211	Blade	24	288	Pitch	1.75mm
				Thickness	0.60mm

WAISTERN H-180 IRON GUTTER

Western style waist saw.
Ideal for cutting iron gutters, iron pipes, copper, aluminum lead, brass pipes, frames, etc.




back blade can be used for deburring contour line
tapered blade for cutting in small spaces

NO.	ITEM	BOX	CTN	SPEC	
15212	Saw	6	36	Blade Length	175mm
15213	Blade	24	288	Pitch	1.41mm
				Thickness	0.70mm

WAISTERN H-180 KITCHEN WALL PANEL

Western style waist saw.
Ideal for cutting kitchen wall panels, plastic, drywalls, etc.

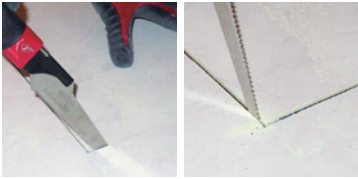

NO.	ITEM	BOX	CTN	SPEC	
15214	Saw	6	36	Blade Length	172mm
15215	Blade	24	288	Pitch	1.50mm
				Thickness	0.60mm

HANDY H-150 FINE CRAFTING

Ideal for precise cutting of various types of wood, aluminum moldings, trims, and bones.



NO.	ITEM	BOX	CTN	SPEC	
07041	Saw	12	72	Blade Length	157mm
07042	Blade	24	—	Pitch	0.90mm
				Thickness	0.30mm



HANDY H-160 FLUSH

Ideal for flush cutting. The teeth do not have saw sets, which prevents damage to the surface. Most suited for flush cutting, but the universal teeth make rip, cross and slant cutting possible.



NO.	ITEM	BOX	CTN	SPEC	
15092	Saw	12	72	Blade Length	168mm
15093	Blade	24	—	Pitch	1.40mm
				Thickness	0.50mm

HANDY H-200 FINE

Ideal for working in narrow spaces and precise cutting.
The universal teeth make cross, rip and slant cutting possible.



NO.	ITEM	BOX	CTN	SPEC	
15088	Saw	12	72	Blade Length	200mm
15089	Blade	24	288	Pitch	1.40mm
				Thickness	0.50mm

HANDY H-200 DAIKUME

A specially designed compact saw. It is ideal for conventional woodwork in confined spaces.



NO.	ITEM	BOX	CTN	SPEC	
15086	Saw	12	72	Blade Length	200mm
15087	Blade	24	288	Pitch	1.75mm
				Thickness	0.50mm

V HANDY H-200 FINE

Features the same blade as the HANDY H-200 FINE, making this saw very portable. Flush cutting is also possible with this saw.



common blade with HANDY H-200 FINE

NO.	ITEM	BOX	CTN	SPEC	
18413	Saw	6	36	Blade Length	200mm
				Pitch	1.40mm
				Thickness	0.50mm



Sawn wood



Universal cut



Precise cut



Pocket cut



Impulse Hardening



Folding



Hook fit



Bi-angle

V HANDY H-200 DAIKUME

Compact folding saw with combination teeth for rip, cross and slant cutting plywood, laminated wood and various types of solid wood.



common blade with HANDY H-200 DAIKUME

NO.	ITEM	BOX	CTN	SPEC	
18411	Saw	6	36	Blade Length	200mm
				Pitch	1.75mm
				Thickness	0.50mm



Sawn wood



Universal cut



Pocket cut



Impulse Hardening



Folding



Hook fit



Bi-angle

VⅢ H-265

Ideal for construction workers and carpenters. Designed for rip, cross and slant cutting plywood, blockboards, MDF and solid wood. A very light, portable and durable saw.



NO.	ITEM	BOX	CTN	SPEC	
18401	Saw	6	36	Blade Length	265mm
				Pitch	1.75mm
				Thickness	0.60mm
18402	Blade	24	—		



Sawn wood



Universal cut



Pocket cut



Impulse Hardening



Folding



Hook fit



Bi-angle

V HANDY H-200 BOARD

Designed for cutting drywalls and plaster boards smoothly.



NO.	ITEM	BOX	CTN	SPEC	
18421	Saw	6	36	Blade Length	190mm
				Pitch	1.40mm
				Thickness	0.70mm
18422	Blade	24	288		



Drywall



Saw coat



Pocket cut



Impulse Hardening



Folding



Hook fit



Bi-angle



RYOBA 250

Double edged blade, featuring rip and cross cutting teeth on either side. Ideal for cutting sawn wood, plywood and laminated wood.



NO.	ITEM	BOX	CTN	SPEC	
52301	Saw	6	36	Blade Length	250mm
				Pitch	1.40mm
				Thickness	0.50mm
52302	Blade	24	—		



Sawn wood



Rip cut



Cross cut



Ni-P plated



Impulse Hardening



Screw fit



DECOLA H-240

Ideal for deep cuts, long cuts and flush cuts.
The specially ground teeth are designed for general lumber, plywood, bamboo, plastic and laminate.
This handle is made of paulownia, which is lightweight and comfortable to hold.



NO.	ITEM	BOX	CTN	SPEC	
08002	Saw	12	72	Blade Length	225mm
08003	Blade	60	600	Pitch	1.50mm
				Thickness	0.60mm

SIDING H-120

Features a compact saw body and tough blade.
Recommended for construction workers to cut siding boards, plaster boards, etc.



NO.	ITEM	BOX	CTN	SPEC	
08112	Saw	12	72	Blade Length	120mm
08113	Blade	24	288	Pitch	1.50mm
				Thickness	0.60mm

BAMBOO H-240

Ideal for cutting bamboo and some precise bamboo work.




NO.	ITEM	BOX	CTN	SPEC	
08008	Saw	12	72	Blade Length	225mm
08016	Blade	24	—	Pitch	1.50mm
				Thickness	0.60mm

BAMBOO H-270

The teeth are designed for bamboo harvesting, allowing smooth cuts through bamboo.



NO.	ITEM	BOX	CTN	SPEC	
15020	Saw	12	72	Blade Length	270mm
15021	Blade	24	—	Pitch	1.75mm
				Thickness	0.66mm

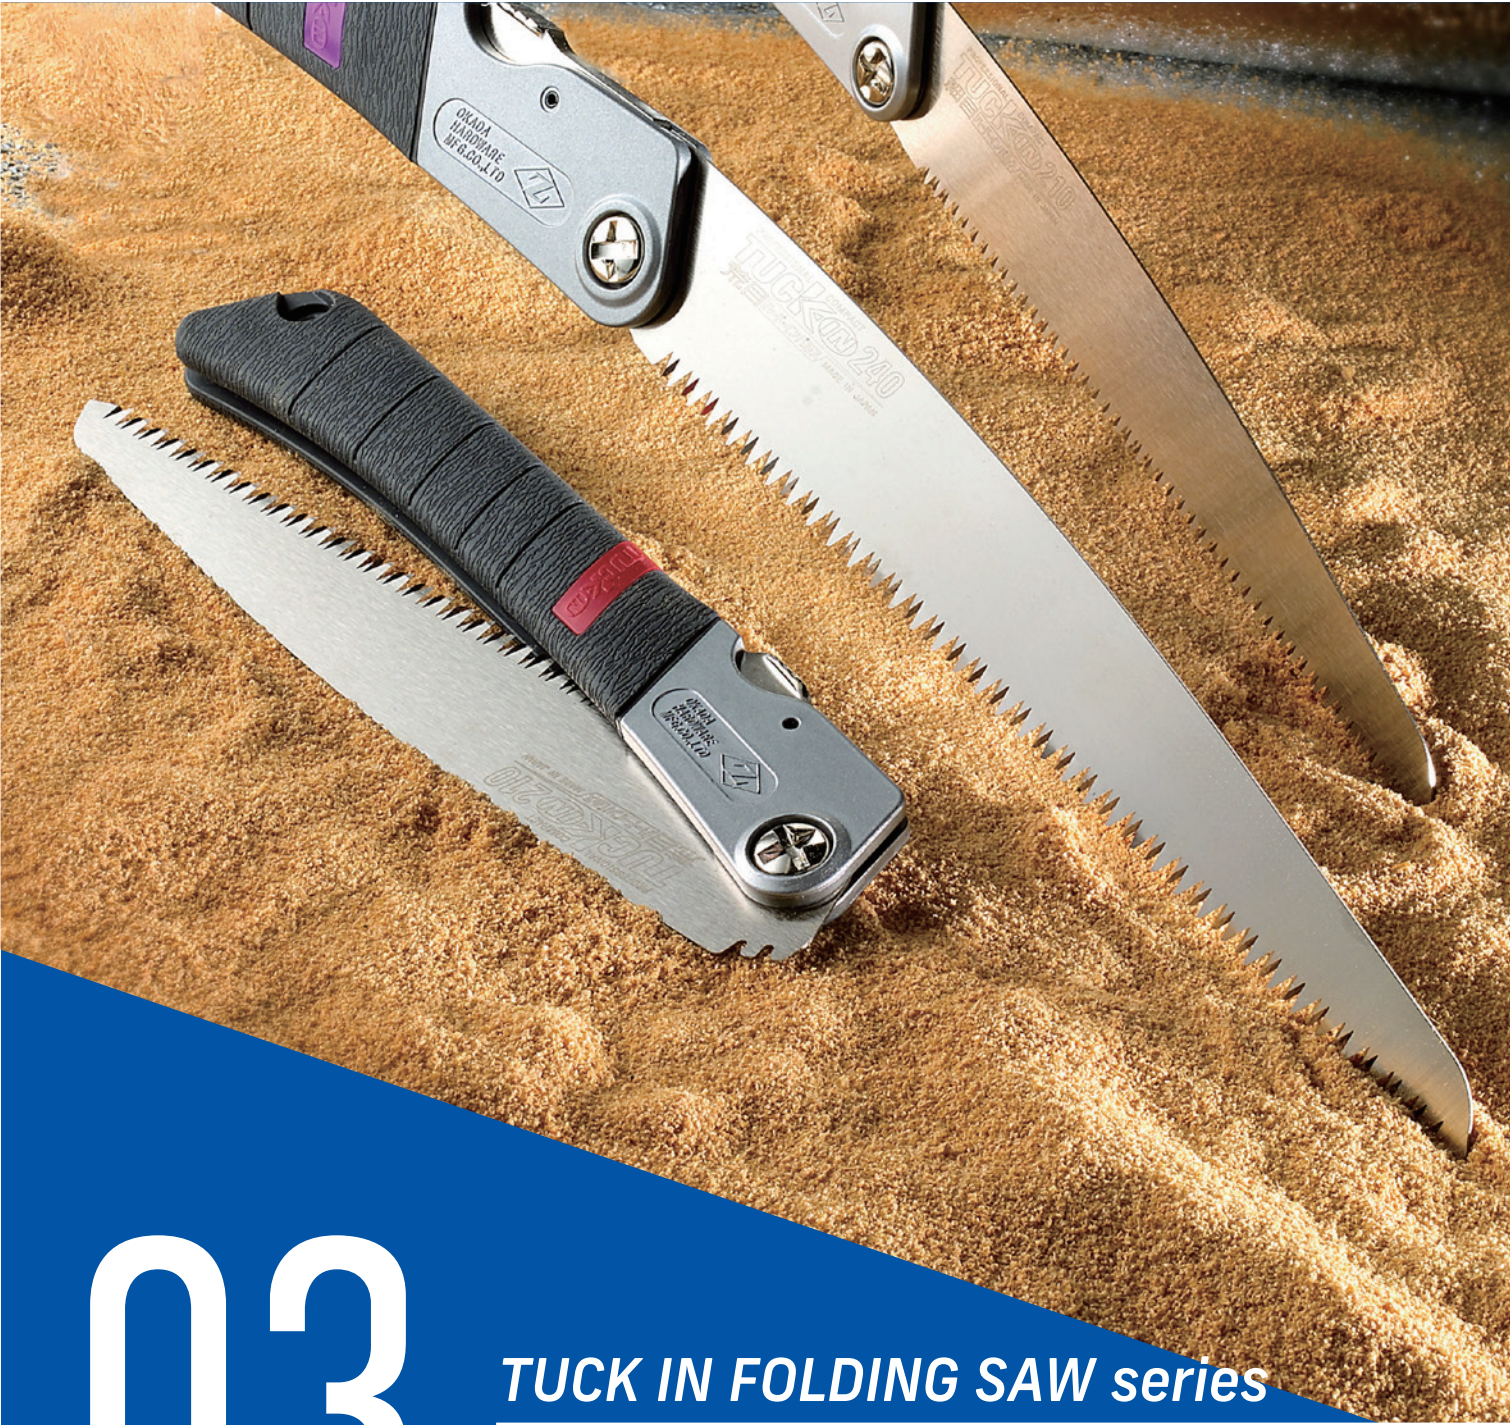

TUCK IN P-210 COARSE

Ideal for pruning orchards and vineyards.
It is also useful for cutting sawn wood, plywood, etc.



NO.	ITEM	BOX	CTN	SPEC	
18001	Saw	6	48	Blade Length	210mm
18201	Blade	24	288	Pitch	3.00mm
				Thickness	0.90mm



TUCK IN P-210 FINE

Developed for incredible cutting performance with
sawn wood, plywood, laminated wood, pruning trees, etc.



NO.	ITEM	BOX	CTN	SPEC	
18002	Saw	6	48	Blade Length	210mm
18202	Blade	24	288	Pitch	2.15mm
				Thickness	0.80mm




TUCK IN P-240 COARSE

Ideal for pruning deciduous fruit trees and cutting sawn
wood, plywood, laminated wood, etc.




NO.	ITEM	BOX	CTN	SPEC	
18003	Saw	6	36	Blade Length	240mm
18203	Blade	24	—	Pitch	3.20mm
				Thickness	1.00mm



TUCK IN P-240 DAIKUME

Ideal for precise woodwork with sawn wood, plywood,
laminated wood, composite panels, etc.

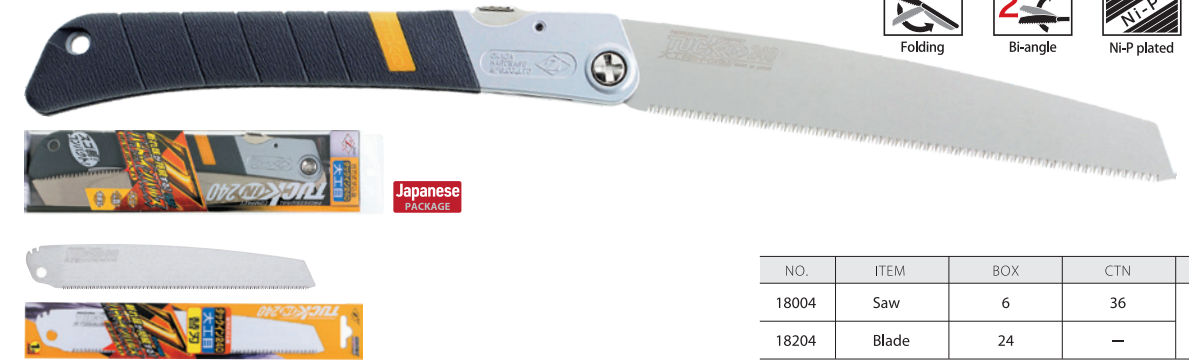

NO.	ITEM	BOX	CTN	SPEC	
18004	Saw	6	36	Blade Length	240mm
18204	Blade	24	—	Pitch	1.75mm
				Thickness	0.70mm



DOZUKI BACKSAW series

Extremely fine 0.3mm thin blades crafted for the most precise woodwork and joinery

04

導突目
DOZUKI FINE



CUTTING DEPTH DOZUKI BACKSAW series
23-24P 240mm Type ≤ 50mm 25-26P 150mm Type ≤ 38mm
50mm 38mm

DOZUKI FINE 240 P1.0/25TPI

Ideal for intricate and precise work such as dovetails, tenon joint making, etc.



NO.	ITEM	BOX	CTN	SPEC	
07121	Saw	12	72	Blade Length	240mm
07122	Blade	24	288	Pitch	1.00mm
				Thickness	0.30mm

DOZUKI H-240 FINE


Ideal for intricate and precise work such as dovetails, tenon joint making, etc. (paulownia handle version)



NO.	ITEM	BOX	CTN	SPEC	
07055	Saw	12	72	Blade Length	240mm
07056	Blade	36	—	Pitch	1.00mm
				Thickness	0.30mm

DOZUKI HARDWOOD 240 P1.2/21TPI

Ideal for cutting hardwood and precise work such as dovetails, tenons and furniture restoration.



NO.	ITEM	BOX	CTN	SPEC	
07123	Saw	12	72	Blade Length	240mm
07124	Blade	24	288	Pitch	1.20mm
				Thickness	0.30mm

DOZUKI H-240 HARDWOOD

Ideal for cutting hardwood and precise work such as dovetails, tenons and furniture restoration. (paulownia handle version)



NO.	ITEM	BOX	CTN	SPEC	
07051	Saw	12	72	Blade Length	240mm
07052	Blade	36	—	Pitch	1.20mm
				Thickness	0.30mm

DOZUKI FINE 150 P1.0/25TPI

Features an extremely fine saw blade, ideal for intricate and precise woodwork such as crafting musical instruments, cutting dovetails, etc.



NO.	ITEM	BOX	CTN	SPEC	
07103	Saw	12	72	Blade Length	150mm
07104	Blade	24	288	Pitch	1.00mm
				Thickness	0.30mm



DOZUKI H-150 FINE

Features an extremely fine saw blade, ideal for intricate and precise woodwork such as crafting musical instruments, cutting dovetails, etc. (black handle version)



NO.	ITEM	BOX	CTN	SPEC	
07047	Saw	12	72	Blade Length	150mm
07048	Blade	24	—	Pitch	1.00mm
				Thickness	0.30mm




DOZUKI HARDWOOD 150 P1.2/21TPI

Features extremely fine and sturdy saw teeth, ideal for cutting dovetails and tenons with hardwood.



NO.	ITEM	BOX	CTN	SPEC	
07105	Saw	12	72	Blade Length	150mm
07106	Blade	24	288	Pitch	1.20mm
				Thickness	0.30mm

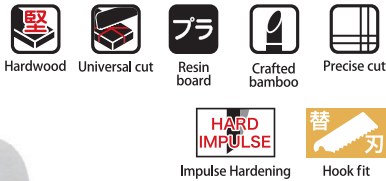


DOZUKI H-150 HARDWOOD

Features extremely fine and sturdy saw teeth, ideal for cutting dovetails and tenons with hardwood. (black handle version)



NO.	ITEM	BOX	CTN	SPEC	
07045	Saw	12	72	Blade Length	150mm
07046	Blade	24	—	Pitch	1.20mm
				Thickness	0.30mm

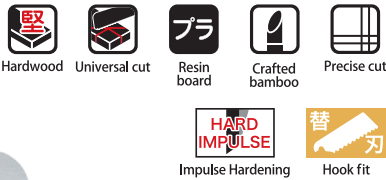


DOZUKI PIERCING 150 P1.41/18TPI

Ideal for intricate and precise woodwork such as crafting musical instruments, dovetails, etc.



NO.	ITEM	BOX	CTN	SPEC	
07101	Saw	12	72	Blade Length	150mm
07102	Blade	24	288	Pitch	1.41mm
				Thickness	0.30mm

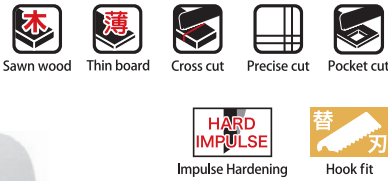



DOZUKI H-150 PIERCING

Ideal for intricate and precise woodwork such as crafting musical instruments, dovetails, etc. (black handle version)



NO.	ITEM	BOX	CTN	SPEC	
07043	Saw	12	72	Blade Length	150mm
07044	Blade	24	—	Pitch	1.41mm
				Thickness	0.30mm



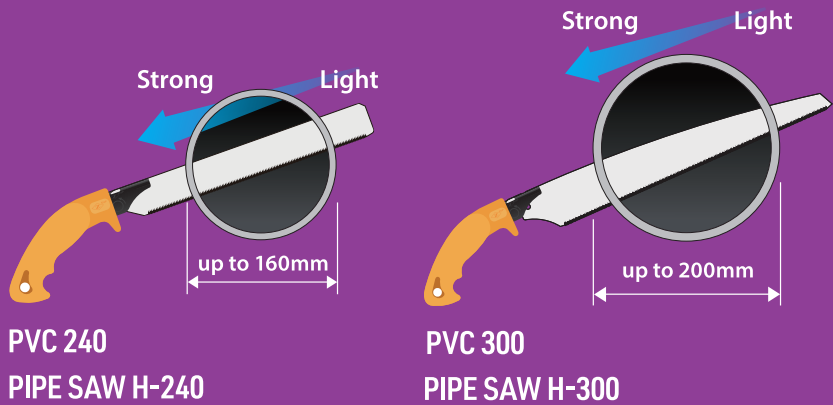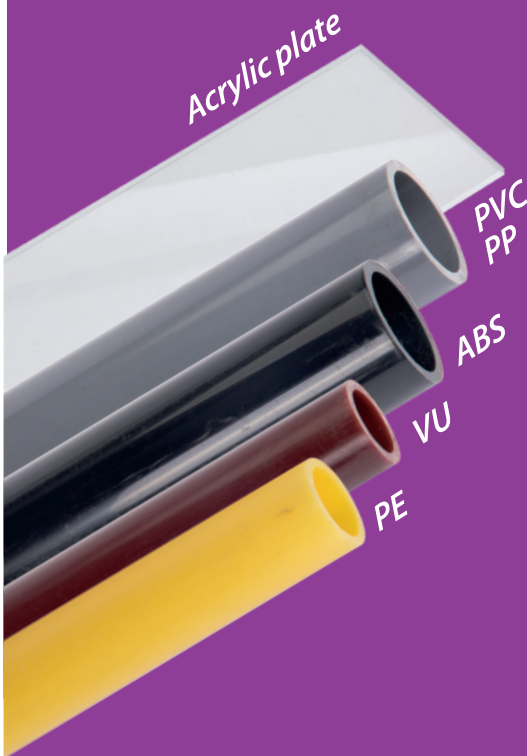

05

UTILITY SAW series

Crafted for professional plumbers.

PVC 240

Ideal for cutting PVC/PE pipes, plastic, acrylic plates, etc.



- プラ Plastic
- パイプ Pipe
- 木 Sawn wood
- NI-P Ni-P plated
- HARD IMPULSE Impulse Hardening
- 替 Hook fit

NO.	ITEM	BOX	CTN	SPEC	
58006	Saw	6	72	Blade Length Pitch Thickness	225mm 1.50mm 0.60mm
58015	Blade	24	288		

PIPE SAW H-240

Ideal for cutting PVC/PE pipes, plastic, acrylic plates, etc.



- プラ Plastic
- パイプ Pipe
- 木 Sawn wood
- NI-P Ni-P plated
- HARD IMPULSE Impulse Hardening
- 替 Hook fit

NO.	ITEM	BOX	CTN	SPEC	
08006	Saw	6	72	Blade Length Pitch Thickness	225mm 1.50mm 0.60mm
08015	Blade	60	600		
08081	Blade (5pcs)	12	120		

PVC 300

Ideal for cutting PVC/PE pipes, plastic, acrylic plates, etc.



- プラ Plastic
- パイプ Pipe
- NI-P Ni-P plated
- HARD IMPULSE Impulse Hardening
- 替 Hook fit

NO.	ITEM	BOX	CTN	SPEC	
58031	Saw	6	72	Blade Length Pitch Thickness	300mm 1.50mm 0.66mm
58032	Blade	24	288		

PIPE SAW H-300

Ideal for cutting PVC/PE pipes, plastic, acrylic plates, etc.



- プラ Plastic
- パイプ Pipe
- NI-P Ni-P plated
- HARD IMPULSE Impulse Hardening
- 替 Hook fit

NO.	ITEM	BOX	CTN	SPEC	
08031	Saw	6	72	Blade Length Pitch Thickness	300mm 1.50mm 0.66mm
08032	Blade	24	240		

PIPE SAW H-240 FLUSH



Ideal for flush cutting PVC/PE pipes, protruding pipes, dowels, wedges, etc. without damaging the surface.



NO.	ITEM	BOX	CTN	SPEC	
08059	Saw	6	72	Blade Length	225mm
08049	Blade	24	—	Pitch	1.50mm
				Thickness	0.60mm

PIPE SAW H-240 TAPERED



Ideal for cutting PVC/PE pipes, plastic, lead tubes, etc.



PIPE SAW SHEATH

The packaging can also be used as a case for saws. It will fit UTILITY SAW series saws with a blade length up to 240mm, and PRUNING saws with item No. 08106, 15272, 15274, 15276. *except for PIPE SAW H-300 and PVC300



NO.	ITEM	BOX	CTN	SPEC	
08998	Sheath	12	—		—



COPPER 240



Designed for cutting aluminum, bronze, brass, lead tubes, PVC, plastic pipes, etc.



PAIMAN H-240



Designed for cutting aluminum, bronze, brass, lead tubes, PVC, plastic pipes, etc.



IRON 240

The tough blade with HSS bi-metal teeth is ideal for cutting iron, aluminum, bronze, brass, lead tubes, etc. in confined spaces.



NO.	ITEM	BOX	CTN	SPEC	
58104	Saw	6	72	Blade Length	225mm
58105	Blade	24	288	Pitch	1.41mm
				Thickness	0.70mm

HSS PAIMAN H-240



The tough blade with HSS bi-metal teeth is ideal for cutting iron, aluminum, bronze, brass, lead tubes, etc. in confined spaces.



NO.	ITEM	BOX	CTN	SPEC	
08104	Saw	10	120	Blade Length	225mm
08105	Blade	24	—	Pitch	1.41mm
				Thickness	0.70mm

06



Fruits tree pruning

Fruit



Landscaping

Forest



Gardening

Garden

PRUNING SAW series

Crafted for professional arborists, fruit growers and gardeners.


Blade replacement

Detachment

Loosen the screw with a coin or a screwdriver and pull the blade out from the handle.



Attachment

Insert the blade and tighten the screw to fix the blade firmly.



Blade care

Please wrap the blade in VCI (Volatile Corrosion Inhibitor) paper or newspaper for storage.

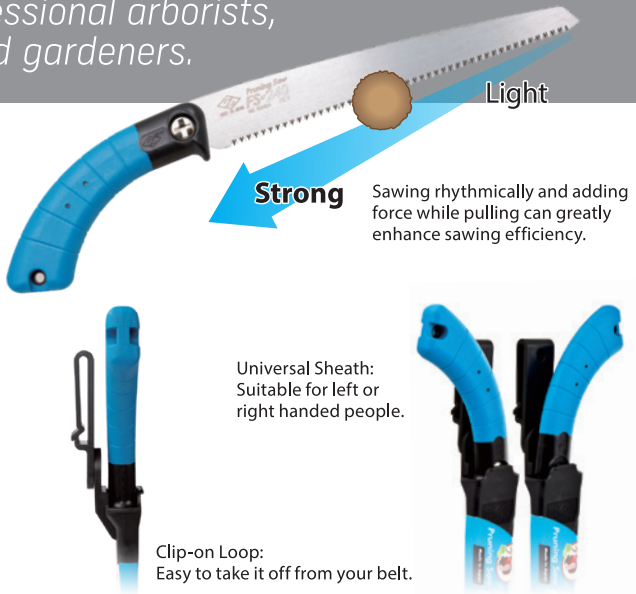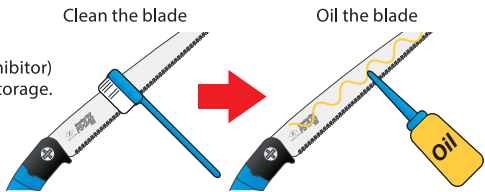


FS-245 P3.5

The firm blade and extremely sharp teeth make this saw ideal for fruit tree pruning and general gardening.



English PACKAGE



NO.	ITEM	BOX	CTN	SPEC	
52431	Saw	6	36	Blade Length	240mm
52432	Blade	24	—	Pitch	3.50mm
				Thickness	0.90mm

FS-275 P3.5

This 270mm length blade featuring extremely aggressive sharp teeth makes this saw ideal for forest tree trimming and gardening.



English PACKAGE



NO.	ITEM	BOX	CTN	SPEC	
52433	Saw	6	36	Blade Length	270mm
52434	Blade	24	—	Pitch	3.50mm
				Thickness	0.90mm

FS-210 P3.0

Ideal for pruning apple, olive, plum and other fruit trees.




English PACKAGE




NO.	ITEM	BOX	CTN	SPEC	
52421	Saw	6	36	Blade Length	210mm
52422	Blade	24	288	Pitch	3.00mm
				Thickness	0.70mm

FS-240 P2.4

Ideal for pruning apple, pear and other fruit trees.




English PACKAGE




NO.	ITEM	BOX	CTN	SPEC	
52423	Saw	6	36	Blade Length	240mm
52424	Blade	24	288	Pitch	2.40mm
				Thickness	0.70mm

FS-270 P2.4

Ideal for pruning apple, peach and other fruit trees.



English PACKAGE



NO.	ITEM	BOX	CTN	SPEC	
52425	Saw	6	36	Blade Length	270mm
52426	Blade	24	288	Pitch	2.40mm
				Thickness	0.70mm



PRUNING SL-200 FINE

Ideal for cutting deciduous fruit trees like peach, grape, kiwi, etc.



NO.	ITEM	BOX	CTN	SPEC	
17109	Saw	6	72	Blade Length	200mm
17102	Blade	24	—	Pitch	2.40mm
				Thickness	0.60mm



PRUNING SL-200

Ideal for cutting deciduous trees like orange, lemon and plum.



NO.	ITEM	BOX	CTN	SPEC	
17110	Saw	6	72	Blade Length	200mm
17104	Blade	24	—	Pitch	3.30mm
				Thickness	0.70mm



PRUNING SL-230

Ideal for cutting deciduous trees like orange, plum, peach, etc.
The coarse teeth make your work more aggressive.



NO.	ITEM	BOX	CTN	SPEC	
17111	Saw	6	72	Blade Length	230mm
17106	Blade	24	—	Pitch	4.00mm
				Thickness	0.80mm



PRUNING H-240 FINE

Ideal for cutting branches.
The tapered blade makes it possible to cut in confined spaces.



NO.	ITEM	BOX	CTN	SPEC	
08106	Saw	6	72	Blade Length	225mm
08103	Blade	60	—	Pitch	1.50mm
				Thickness	0.60mm



PRUNING H-240 FINE PEAR

The sharply ground fine teeth with a tapered foreblade make this saw ideal for pruning branches in confined spaces and at gaps in tangled branches.



NO.	ITEM	BOX	CTN	SPEC	
15272	Saw	6	72	Blade Length	240mm
15273	Blade	24	—	Pitch	2.00mm
				Thickness	0.70mm



PRUNING H-210 COARSE CITRUS

The coarse and sharp razor teeth are designed for pruning hard fruit trees like orange, olive, etc.



NO.	ITEM	BOX	CTN	SPEC	
15274	Saw	6	72	Blade Length	210mm
15275	Blade	24	—	Pitch	3.00mm
				Thickness	0.70mm



PRUNING H-210 COARSE PLUM

The coarse and sharp razor teeth are designed for pruning hard fruit trees like plum, olive, etc.



NO.	ITEM	BOX	CTN	SPEC	
15276	Saw	6	72	Blade Length	210mm
15277	Blade	24	—	Pitch	3.00mm
				Thickness	0.70mm



HANDLE

STRAIGHT H-270 Wood

No.15994



STRAIGHT H-300 Wood

No.15990



STRAIGHT H-300 Red

No.15952



STRAIGHT H-300 Blue

No.15953



STRAIGHT H-300 Black

No.15971



STRAIGHT H-150

No.15958



STRAIGHT H-240 Wood SH

No.08992



STRAIGHT H-330 Wood

No.15991



STRAIGHT H-330 Orange

No.15973



PISTOL H-145 Green

No.15996



PISTOL H-126 Blue

No.08996



PISTOL H-126 Red

No.08991



PISTOL H-126 SH

No.15278



PISTOL H-145 Orange

No.08994



PISTOL H-126 Yellow

No.08993



BLADE REPLACEMENT

Caution Please wear hand protection or wrap the blade in a cloth to prevent injury.



Hook-Fit


AUTHENTIC JAPANESE SAW series

UTILITY SAW series

PRUNING H-240/PRUNING H-210

Detachment


- ① Tap the handle end with the saw teeth facing upward to loosen the blade.
- ② Pull the blade out of the back metal.

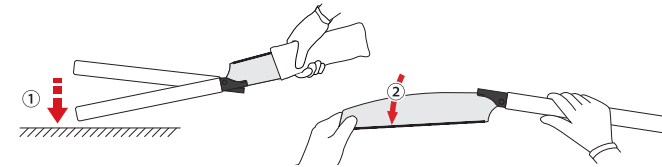

※Never detach a blade by knocking the back of the blade toe.

Attachment

- ① Insert the blade into the back metal and hook onto the hook point.
- ② Push the blade into the gap of the back metal as a temporary lock.
- ③ Tap the handle end gently with the saw teeth facing downward to fix the blade firmly.

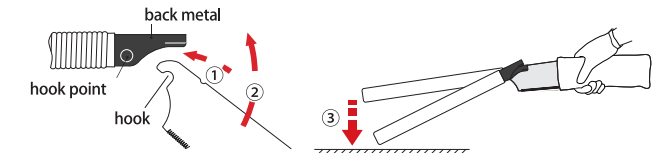

※Never hit hard at once. Tap many times.



Hook-Fit

V HANDY H-200 / V H-265

△ Unfold the blade and make sure that the back metal is locked before replacing a blade.

Detachment


- ① Tap the handle end with the saw teeth facing upward to loosen the blade.
- ② Pull the blade out of the back metal.



※Never detach a blade by knocking the back of the blade toe.

Attachment

- ① Insert the blade into the back metal and hook onto the hook point.
- ② Push the blade into the gap of the back metal as a temporary lock.
- ③ Tap the handle end gently with the saw teeth facing downward to fix the blade firmly.

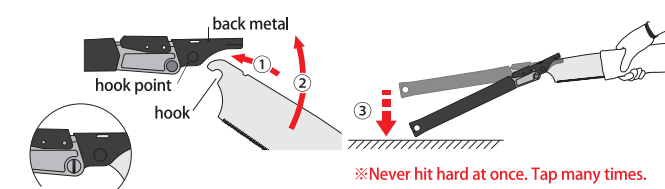

※When opening and closing, adjust the tightness with the adjusting screw for looseness.




Hook-Fit

DOZUKI BACKSAW series

※This applies only to DOZUKI BACKSAW series.

Detachment


- ① Tap the blade end with the saw teeth facing upward to loosen the blade.
- ② Pull the blade out of the long back metal.

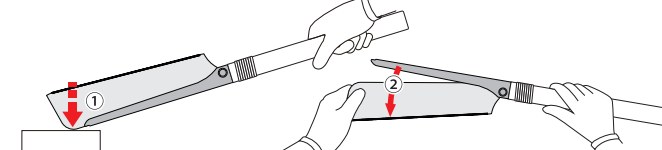

※Never detach a blade by knocking the back of the blade toe.

Attachment

- ① Insert the blade into the long back metal and hook onto the hook point.
- ② Push the blade into the gap of the long back metal as a temporary lock.
- ③ Tap the long back metal gently with the saw teeth facing upward to fix the blade firmly.

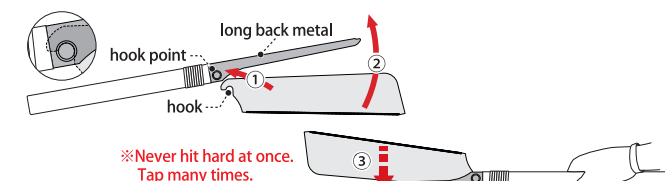

※Never hit hard at once. Tap many times.



Screw-Fit


ZETSAW DIY series

FS/PRUNING SL

RYOBA 250


Detachment

- ① Loosen the screw with a coin or a screwdriver.
- ② Pull the blade out from the handle.
(Do not remove the screw.)



Attachment

- ① Insert the blade.
- ② Cover the end slit of the blade and tighten the screw lock.
- ③ Make sure the screw is tight and the blade doesn't rattle.




Screw-Fit

COMPASS series


Detachment

- ① Loosen the screw with a coin or a screwdriver.
- ② Pull the blade out from the handle.
(Do not remove the screw.)



Attachment

- ① Insert the blade.
- ② Cover the hole of the blade and tighten the screw lock.
- ③ Make sure of the loose screw and the rattling blade.




Pin-Fit

TUCK IN FOLDING SAW series


Detachment

- ① With the blade folded in, remove the bolt and the washer after loosening the bolt with a coin, etc.
- ② Pull the nut out.
- ③ Remove the blade.



Attachment

- ① Insert the blade into the handle, ensuring the holes are aligned.
- ② Insert the nut.
- ③ Insert the washer and bolt, ensure the blade can move smoothly before tightening the bolt.





07

ZETSAW DIY series

Crafted to make your woodworking more enjoyable

SAW GUIDE BEST SET

The compact saw guide is designed to be used with both UNIVERSAL S-265 and UNIVERSAL S-175 to cut wood squarely at 90°, and right & left horizontally at 45°.



ITEM	CTN
30107	12



90° CROSS CUT

Using SAW GUIDE, 90° square cutting can be performed easily.



MITER CUT

Using the 45° angle attachment, 45° miter cutting can be performed easily.




CUTTING WIDE BOARD

By setting up the parallel sliding holder, wide board cutting can be performed easily.

SAW GUIDE F SET

Designed to be used with the UNIVERSAL S-265 saw to cut work pieces at any angle, from 45° to the right or left, both horizontally and vertically.



ITEM	CTN
30106	12



PARALLEL 45°-90°

By adjusting the parallel angle bracket, cuts from 45° to the right or left can be performed.



VERTICAL 45°-90°

By adjusting the vertical angle bracket, cuts up to 45° forward or backward can be performed.










CUTTING WIDE BOARD

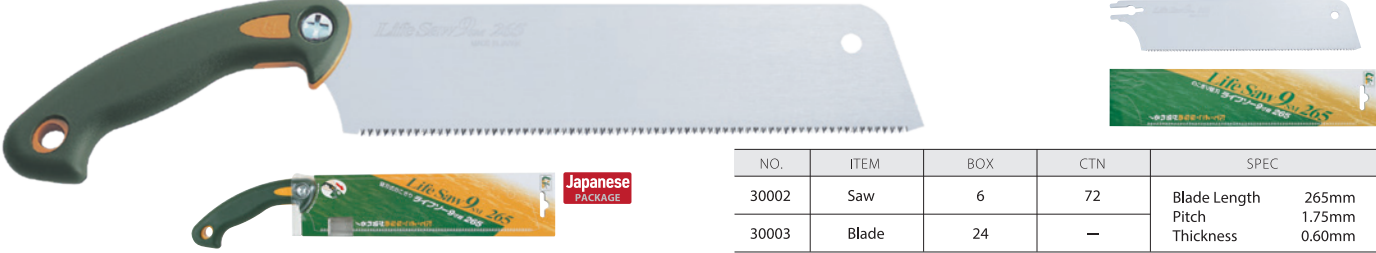By setting up the parallel sliding holder, wide board cutting can be performed easily.

UNIVERSAL S-265

Ideal for rip, cross and slant cutting sawn wood, plywood, laminated wood, etc.













Sawn wood Universal cut DIY Ni-P plated Impulse Hardening Screw fit

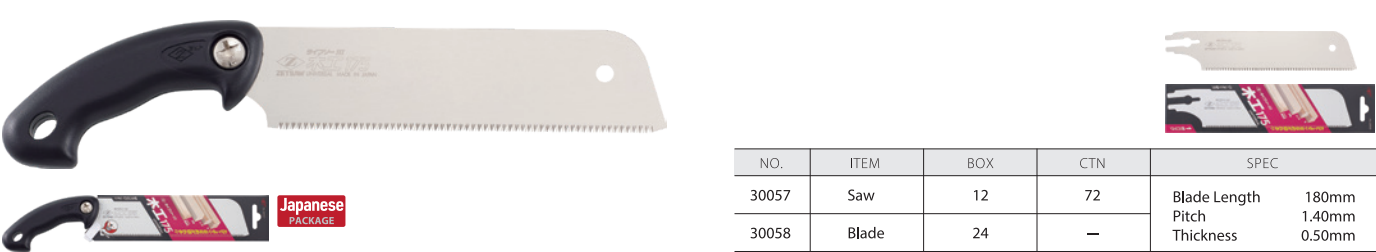NO.	ITEM	BOX	CTN	SPEC	
30002	Saw	6	72	Blade Length	265mm
30003	Blade	24	—	Pitch	1.75mm
				Thickness	0.60mm

UNIVERSAL S-175

Designed for rip, cross and slant cutting sawn wood, plywood, solid wood, laminated wood, etc.











Sawn wood Universal cut Thin board DIY Ni-P plated Impulse Hardening Screw fit

NO.	ITEM	BOX	CTN	SPEC	
30057	Saw	12	72	Blade Length	180mm
30058	Blade	24	—	Pitch	1.40mm
				Thickness	0.50mm

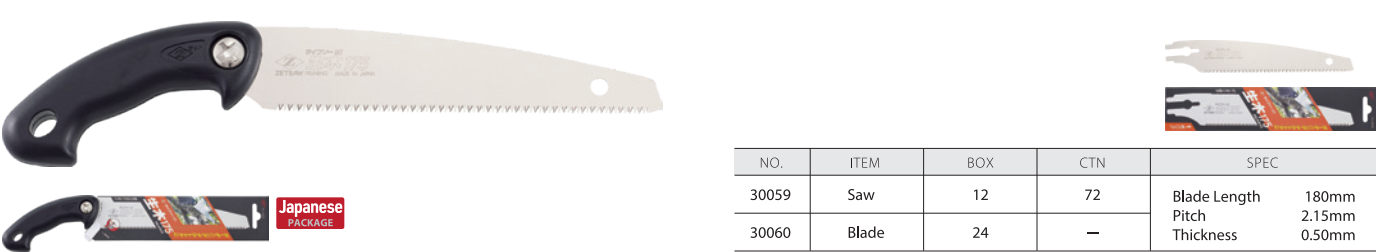PRUNING S-175

A compact blade with extra sharp teeth, ideal for home gardening.












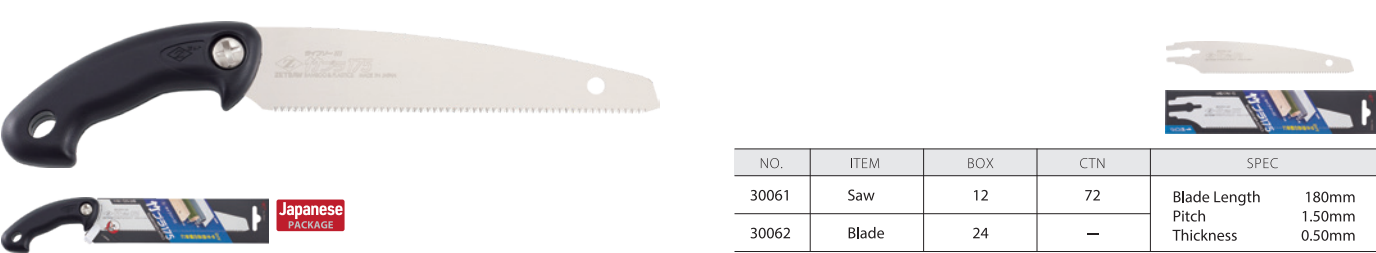

Green wood Pruning Ni-P plated Impulse Hardening Screw fit

NO.	ITEM	BOX	CTN	SPEC	
30059	Saw	12	72	Blade Length	180mm
30060	Blade	24	—	Pitch	2.15mm
				Thickness	0.50mm

BAMBOO & PLASTIC S-175

A compact body with specially ground teeth, ideal for cutting PVC/PE pipes, acrylic resin plates, bamboo, etc.












Bamboo Plastic Sawn wood Thin board DIY Ni-P plated Impulse Hardening Screw fit

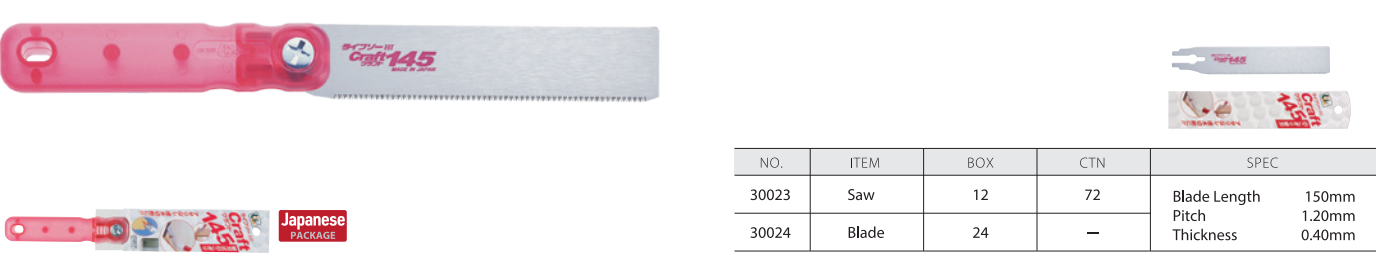NO.	ITEM	BOX	CTN	SPEC	
30061	Saw	12	72	Blade Length	180mm
30062	Blade	24	—	Pitch	1.50mm
				Thickness	0.50mm

FLUSH S-145

This saw features very fine teeth and do not have saw sets, ideal for trimming dowels, tenons, etc.






Sawn wood DIY No Set Ni-P plated Impulse Hardening Screw fit








NO.	ITEM	BOX	CTN	SPEC	
30023	Saw	12	72	Blade Length	150mm
30024	Blade	24	—	Pitch	1.20mm
				Thickness	0.40mm

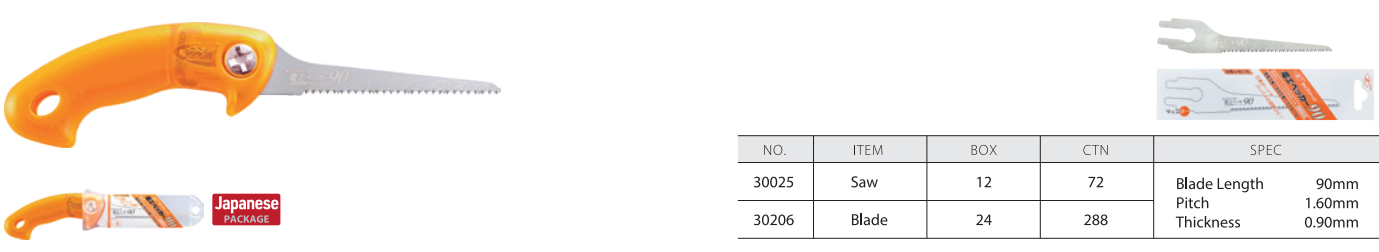

DRYWALL S-90

Ideal for pocket cuts on drywalls, plaster boards, etc.













Sawn wood Drywall Pocket cut Curve Ni-P plated Impulse Hardening Screw fit

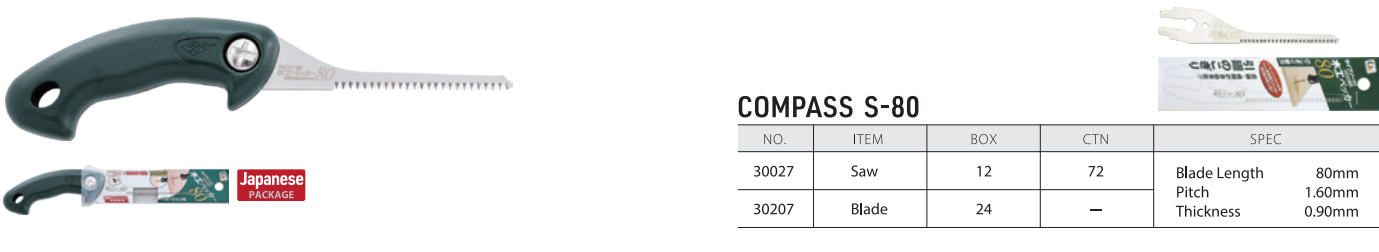NO.	ITEM	BOX	CTN	SPEC	
30025	Saw	12	72	Blade Length	90mm
30206	Blade	24	288	Pitch	1.60mm
				Thickness	0.90mm

COMPASS series

Designed for cutting tight curves and circles on sawn wood, plywood, laminated wood, etc.





Sawn wood DIY Curve Pocket cut Ni-P plated Impulse Hardening Screw fit

NO.	ITEM	BOX	CTN	SPEC	
30027	Saw	12	72	Blade Length	80mm
30207	Blade	24	—	Pitch	1.60mm
				Thickness	0.90mm

COMPASS S-80

NO.	ITEM	BOX	CTN	SPEC	
30027	Saw	12	72	Blade Length	80mm
30207	Blade	24	—	Pitch	1.60mm
				Thickness	0.90mm

COMPASS S-150

NO.	ITEM	BOX	CTN	SPEC	
30028	Saw	12	72	Blade Length	150mm
30208	Blade	24	—	Pitch	1.60mm
				Thickness	0.90mm

COMPASS S-210

NO.	ITEM	BOX	CTN	SPEC	
30029	Saw	12	72	Blade Length	210mm
30209	Blade	24	—	Pitch	1.60mm
				Thickness	0.90mm



THE ORIGINAL

ZETSAW are the proprietors of blade interchangeable handsaws, which have shaped industry standards worldwide. As the inventors of the system, ZETSAW boasts one of the widest ranges of blade interchangeable handsaws in the industry.

We manufacture blades designed for disciplines such as horticulture, construction, cabinet making, furniture restoration, etc. to suit the changing needs of the market.

THE INNOVATION

At ZETSAW, we have introduced Impulse Hardening to the Japanese handsaw industry.

This new innovation has proven to drastically improve blade toughness, compared to traditional hardening techniques.

Impulse Hardening yields an 850-950HV(66-68HRC) hardness, making them much tougher than conventional hand-forged saws.

We continue to study and innovate with tools, and will continue to do so in the future in order to satisfy our customer's needs.

COMPANY PROFILE

Name	Okada Hardware Mfg. Co., Ltd
Address	561 Omura, Miki-city, Hyogo, Japan
Postal Code	673-0404
TEL	+81-794-83-2001
FAX	+81-794-70-8828
Establishment	April 27th 1943
Capital	¥ 50,000,000
Products	• Handsaws • Reciprocating saw blades • Saw guides, etc.
URL	https://z-saw.co.jp/en/
E-mail	sales1@z-saw.co.jp



JQA-QMA14387



091

